

Phono[®] Solar

Premium Module

Poly/270-280W



Excellent Temperature Coefficient



Higher Power Output

Outstanding performance in weak-light conditions



Better Durability


Enhanced durability in practical application through more strict in house testing standards than IEC

Bloomberg
NEW ENERGY FINANCE

Tier1



TOP
PERFORMER

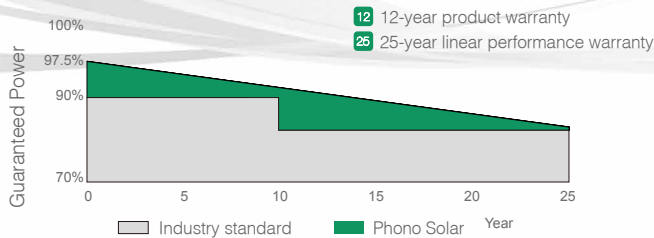

EN EN-20190515

SINOMACH | SUMEC
SUMEC GROUP CORPORATION

ELECTRICAL TYPICAL VALUES

Model	PS270P-20/U PS270PH-20/U	PS275P-20/U PS275PH-20/U	PS280P-20/U PS280PH-20/U
Type	Polycrystalline 6 inch x 6 inch square, 6 x 10 pieces in series		
Rated Power (Pmpp)	270W	275W	280W
Rated Current (Impp)	8.59	8.66	8.73
Rated Voltage (Vmpp)	31.44	31.76	32.08
Short Circuit Current (Isc)	9.09	9.17	9.25
Open Circuit Voltage (Voc)	38.39	38.73	39.09
Module Efficiency (%)	16.60	16.90	17.21
NOCT (Nominal Operation Cell Temperature)	45±2°C		
Voltage Temperature Coefficient	-0.31%/°C		
Current Temperature Coefficient	+0.06%/°C		
Power Temperature Coefficient	-0.40%/°C		

MECHANICAL CHARACTERISTICS

Dimension (L x W x H)	Length: 1640mm (64.57 inch) Width: 992mm (39.06 inch) Height: 35mm (1.38 inch)
Weight	18kg (39.68 lbs)
Front Glass	3.2mm toughened glass
Frame	Anodized aluminium alloy
Cable	4mm ² (IEC) , Length:900mm or Customized Length
Junction Box	IP 68 rated

ABSOLUTE MAXIMUM RATING




Parameter	Values
Operating Temperature	From -40 to +85°C
Hail Diameter @ 80km/h	Up to 25mm
Surface Maximum Load Capacity	Up to 5400Pa
Maximum Series Fuse Rating	20A
Application Class and Safety Class	II
Fire Rating (IEC61730)	C
Module Fire Performance (UL 1703)	Type 1
Maximum System Voltage	DC 1000V/1500V (IEC/ETL)

PACKING CONFIGURATION

Container	20' GP	40' HQ
Pieces/Container	312	896

- In compliance with our warranty terms and conditions.
- Measurement conditions under irradiance level of Standard Test Conditions(STC): 1000W/m²
Air mass 1.5 Spectrum, cell temperature of 25°C.

ELECTRICAL CHARACTERISTICS

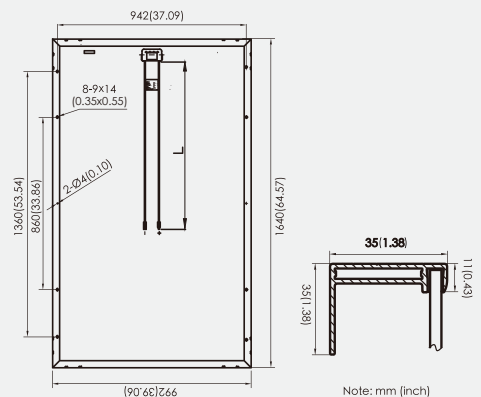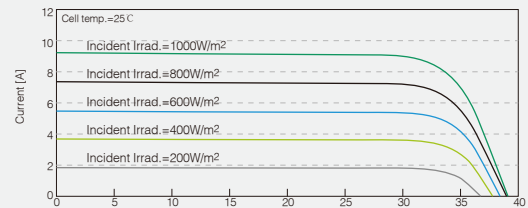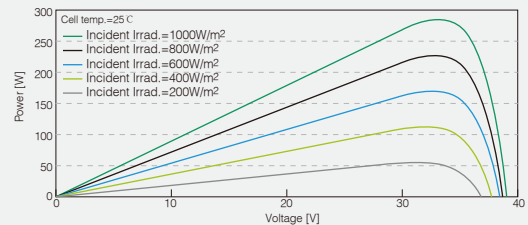

Phono[®] Solar

Note: This datasheet is not legally binding. Phono Solar Technology Co., Ltd. reserves the right to adjust specifications without notice. Further information please refer to our [Website:www.phonosolar.com](http://www.phonosolar.com), [E-mail:info@phonosolar.com](mailto:info@phonosolar.com)